

Guide to Assembly & Usage

4 Level Workstation

Information
If in doubt, contact the supplier

Read this guide thoroughly before commencing assembly and retain for future reference

Before commencing assembly, unpack carefully and check that all components ordered are included

Assembly should be undertaken by a minimum of two competent people

Tools – Small rubber mallet

Assess for floor fixing. Tall narrow bays may require this to ensure stability

Caution
During assembly, ensure to:

Take care during assembly and in use, particularly when lifting or stretching & when using tools

Wear appropriate safety clothing – protective gloves and footwear are recommended

Build on a suitable level floor, which is strong enough to support the load and allow adequate working space

Dispose of packaging materials responsibly

Warning
Rules for the safe use of Workstations:

Ensure these instructions are retained for reference and that users are aware of the rules for safe use

Never climb on the structure or stand on the Workstation

Do not lean or support ladders, steps, or other objects against Workstation

Always use safety steps to reach high shelves

Do not use in damp or wet conditions

Load heavy items on the lower shelves & lighter items on the higher shelves

This product is designed for hand loading only




Ensure that the maximum load carrying capacities are not exceeded

Please refer to the loading information supplied for details

Workstations are safe when used responsibly.
If in doubt, contact the supplier



COMPONENT CHECK LIST

Component	WSA	WSB
	Quantity	Quantity
A Tall Uprights 	2	2
B Medium Uprights 	2	4
C Short Uprights 	2	N/A
D Chipboard for Bench 	2	2
E Chipboard for Shelf 	2	2
F Plastic Feet 	6	6
G Front/Back Beam 	8	8
H Side Beam 	4	4
I Shelf Side Beam 	4	4
J Centre Support 	2	4
K Shelf Centre Support 	2	4

Loading information

Medium Duty Adjustable Workbench

For any other layouts, please refer to your supplier for detailed loading capacities

Medium Duty Adjustable Workbench	
Maximum load per top shelf	Maximum load per bench level
100kg	300kg

Shelf load capacities

Maximum permitted bay capacities are based on UDL†.


IF YOU ARE IN ANY DOUBT REGARDING LOAD CAPACITIES, PLEASE CONTACT YOUR SUPPLIER

†UDL = Uniformly Distributed Load


If you have any missing components please take note of the part name and code and contact your supplier

Assembly - 4 Level Workstation


- 1** Fit plastic feet **F** to all uprights **(A B C)**

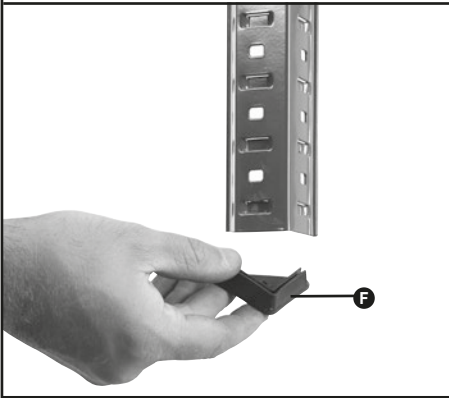


- 2** Insert a side beam **H** into the highest point of the medium upright **B** and tap down using a rubber mallet

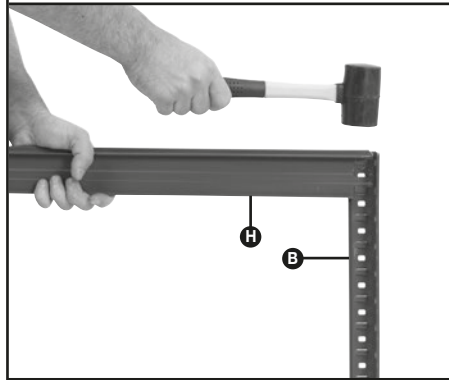


- 3** Ensuring that the side beam **H** is level, insert the beam into a tall upright **A** and tap down using a rubber mallet

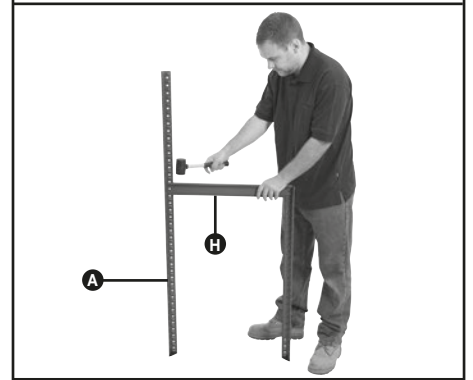

- 4** With the same technique fit a second side beam **H** at the height required for the lower shelf

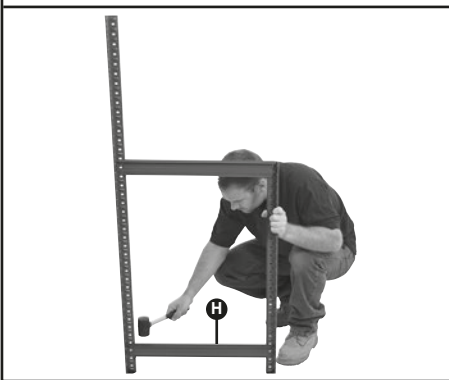


- 5** Repeat steps 2-4 to make a second side frame

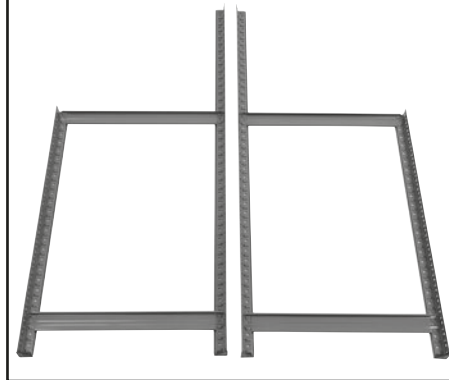


- 6** Using the long front/back beams **G** connect the two frames at the same levels as the side beams




- 7** Bend the centre support **J** tabs at right angles

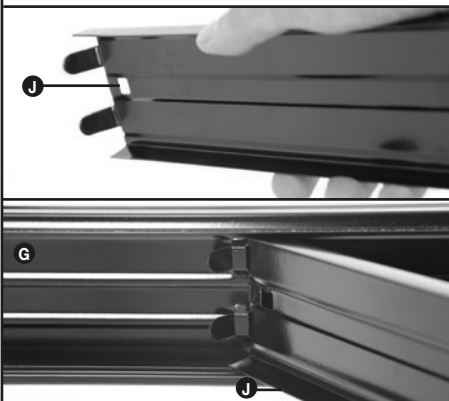


- 8** Slide the centre support beams into the slots in the long front/back beams and bend over using a screwdriver

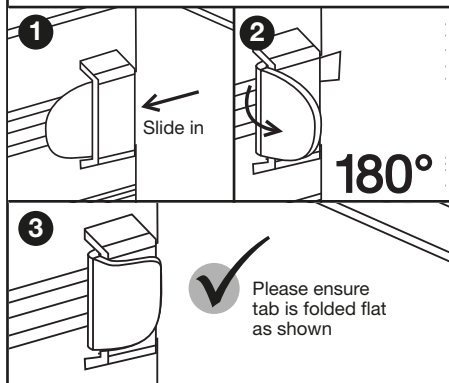

- 9** Fit a front/back beam in between the two uprights at the highest level and fit the chipboard for bench **D** on to the bench levels

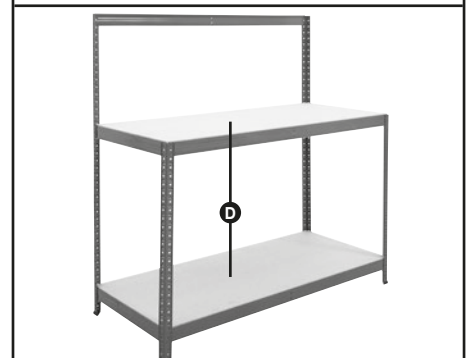

- 10** Fit the shelf side beams **I** to the top of the remaining uprights **C** together with the lower shelf at the required level and fit to the uprights

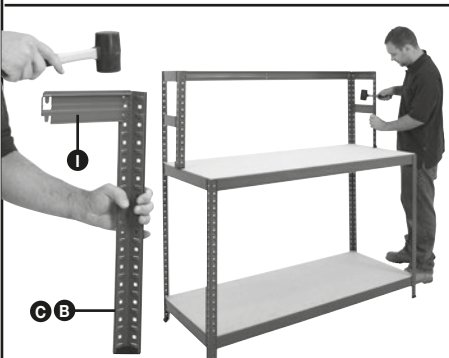

- 11** In the shelf levels fit the centre supports **K** as per steps 7-8



- 12** Fit the remaining chipboard for shelf **E** to create the two upper shelves

