

Guide to Assembly & Usage

Chrome Trolley

Information
If in doubt, contact the supplier

Read this Guide thoroughly before commencing assembly and retain for future reference

Before commencing assembly, unpack carefully and check that all components ordered are included

Tools required – Rubber faced mallet and 8mm Hex key

Caution
During assembly, ensure to:

Take care during assembly and in use, particularly when lifting or stretching and when using tools

Assemble for use on a suitable level floor surface

Allow adequate working space and be aware of others working around you

Dispose of packaging materials responsibly

Warning
Rules for the safe use of trolleys:

Please retain these instructions for reference and ensure that users understand the rules for safe use

THIS PRODUCT IS DESIGNED FOR HAND LOADING ONLY







ENSURE THAT THE MAXIMUM LOAD CARRYING CAPACITIES ARE NOT EXCEEDED

PLEASE REFER TO THE LOADING CHART SUPPLIED FOR DETAILS

Trolleys are safe when used responsibly.
If in doubt, contact the supplier




COMPONENT CHECK LIST

Component	Quantity	Code
Chrome Wire Shelf 	CT1 x2 CT3 x3 CT6 x4	CL94
Trolley Handle 	2	CTH86
Plastic Shelf Retaining Clip 	CT1 x16 CT3 x24 CT6 x32	CLPC
Castor with Expander Fitting 	2	CC100S/ EXP22
Braked Castor with Expander Fitting 	2	CC100SB/ EXP22
8mm Hex Key 	1	CCEXPk


If you have any missing components please take note of the part name and code and contact your supplier

Assembly - Chrome Trolley

- 1** Start by sliding one of the trolley levels to the top of the handles with the handle grips facing outwards

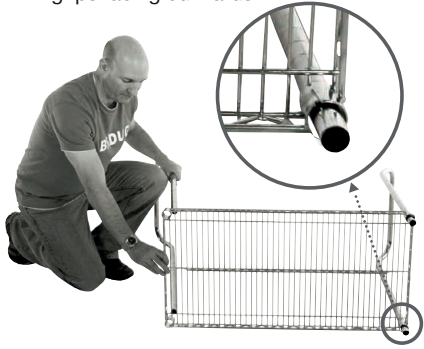

- 2** Decide how high you would like the top level to be and count the grooves in the handle upright. At this level place a plastic clip in the corresponding groove in the handle

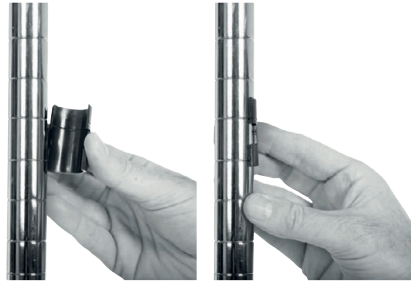

- 3** Fit the second clip opposite the first so that they completely surround the handle upright




- 4** Repeat at the same level on all uprights and press shelf down on clips




- 5** Decide what height you would like the next level to be and repeat the processes 1 - 4



- 6** Stand the trolley on its feet and tap shelf levels down with a rubber mallet

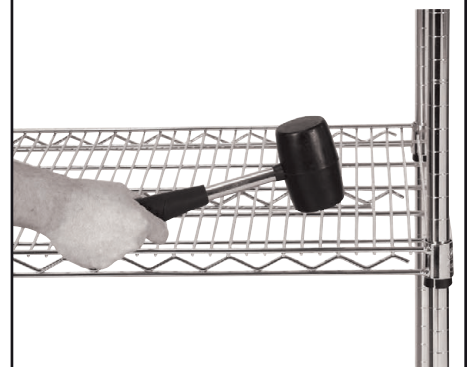

- 7** To fit the castors slide the castor with expanding socket into the upright handle and tighten clockwise with an 8mm hex key until tight

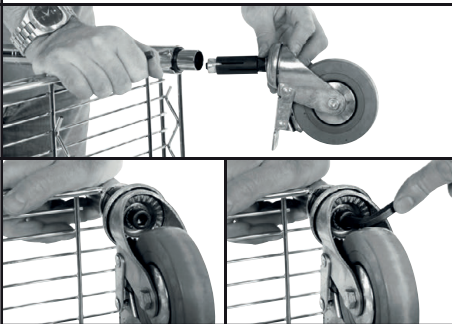

- 8** *Tip: Fit both braked castors at the same end*



Note: Illustrations not to scale

The information contained in this leaflet was accepted as correct at the date of publication. However, the manufacturer reserves the right to make any necessary changes, in line with the product development and improvement. Although all reasonable care has been taken to make it as complete and accurate as possible, no liability can be accepted for any inaccuracies or omissions.

Loading information

Chrome Trolley

Trolley load capacities

The maximum load permitted is 200kgs. However, this is dependant on the maximum shelf load capacities as detailed below.

Shelf W x D	Max Shelf Capacity (kg UDL)	Max Trolley Capacity (kg UDL)
915	50	200

UDL = Uniformly Distributed Load

IF YOU ARE IN ANY DOUBT REGARDING LOAD CAPACITIES, PLEASE CONTACT YOUR SUPPLIER